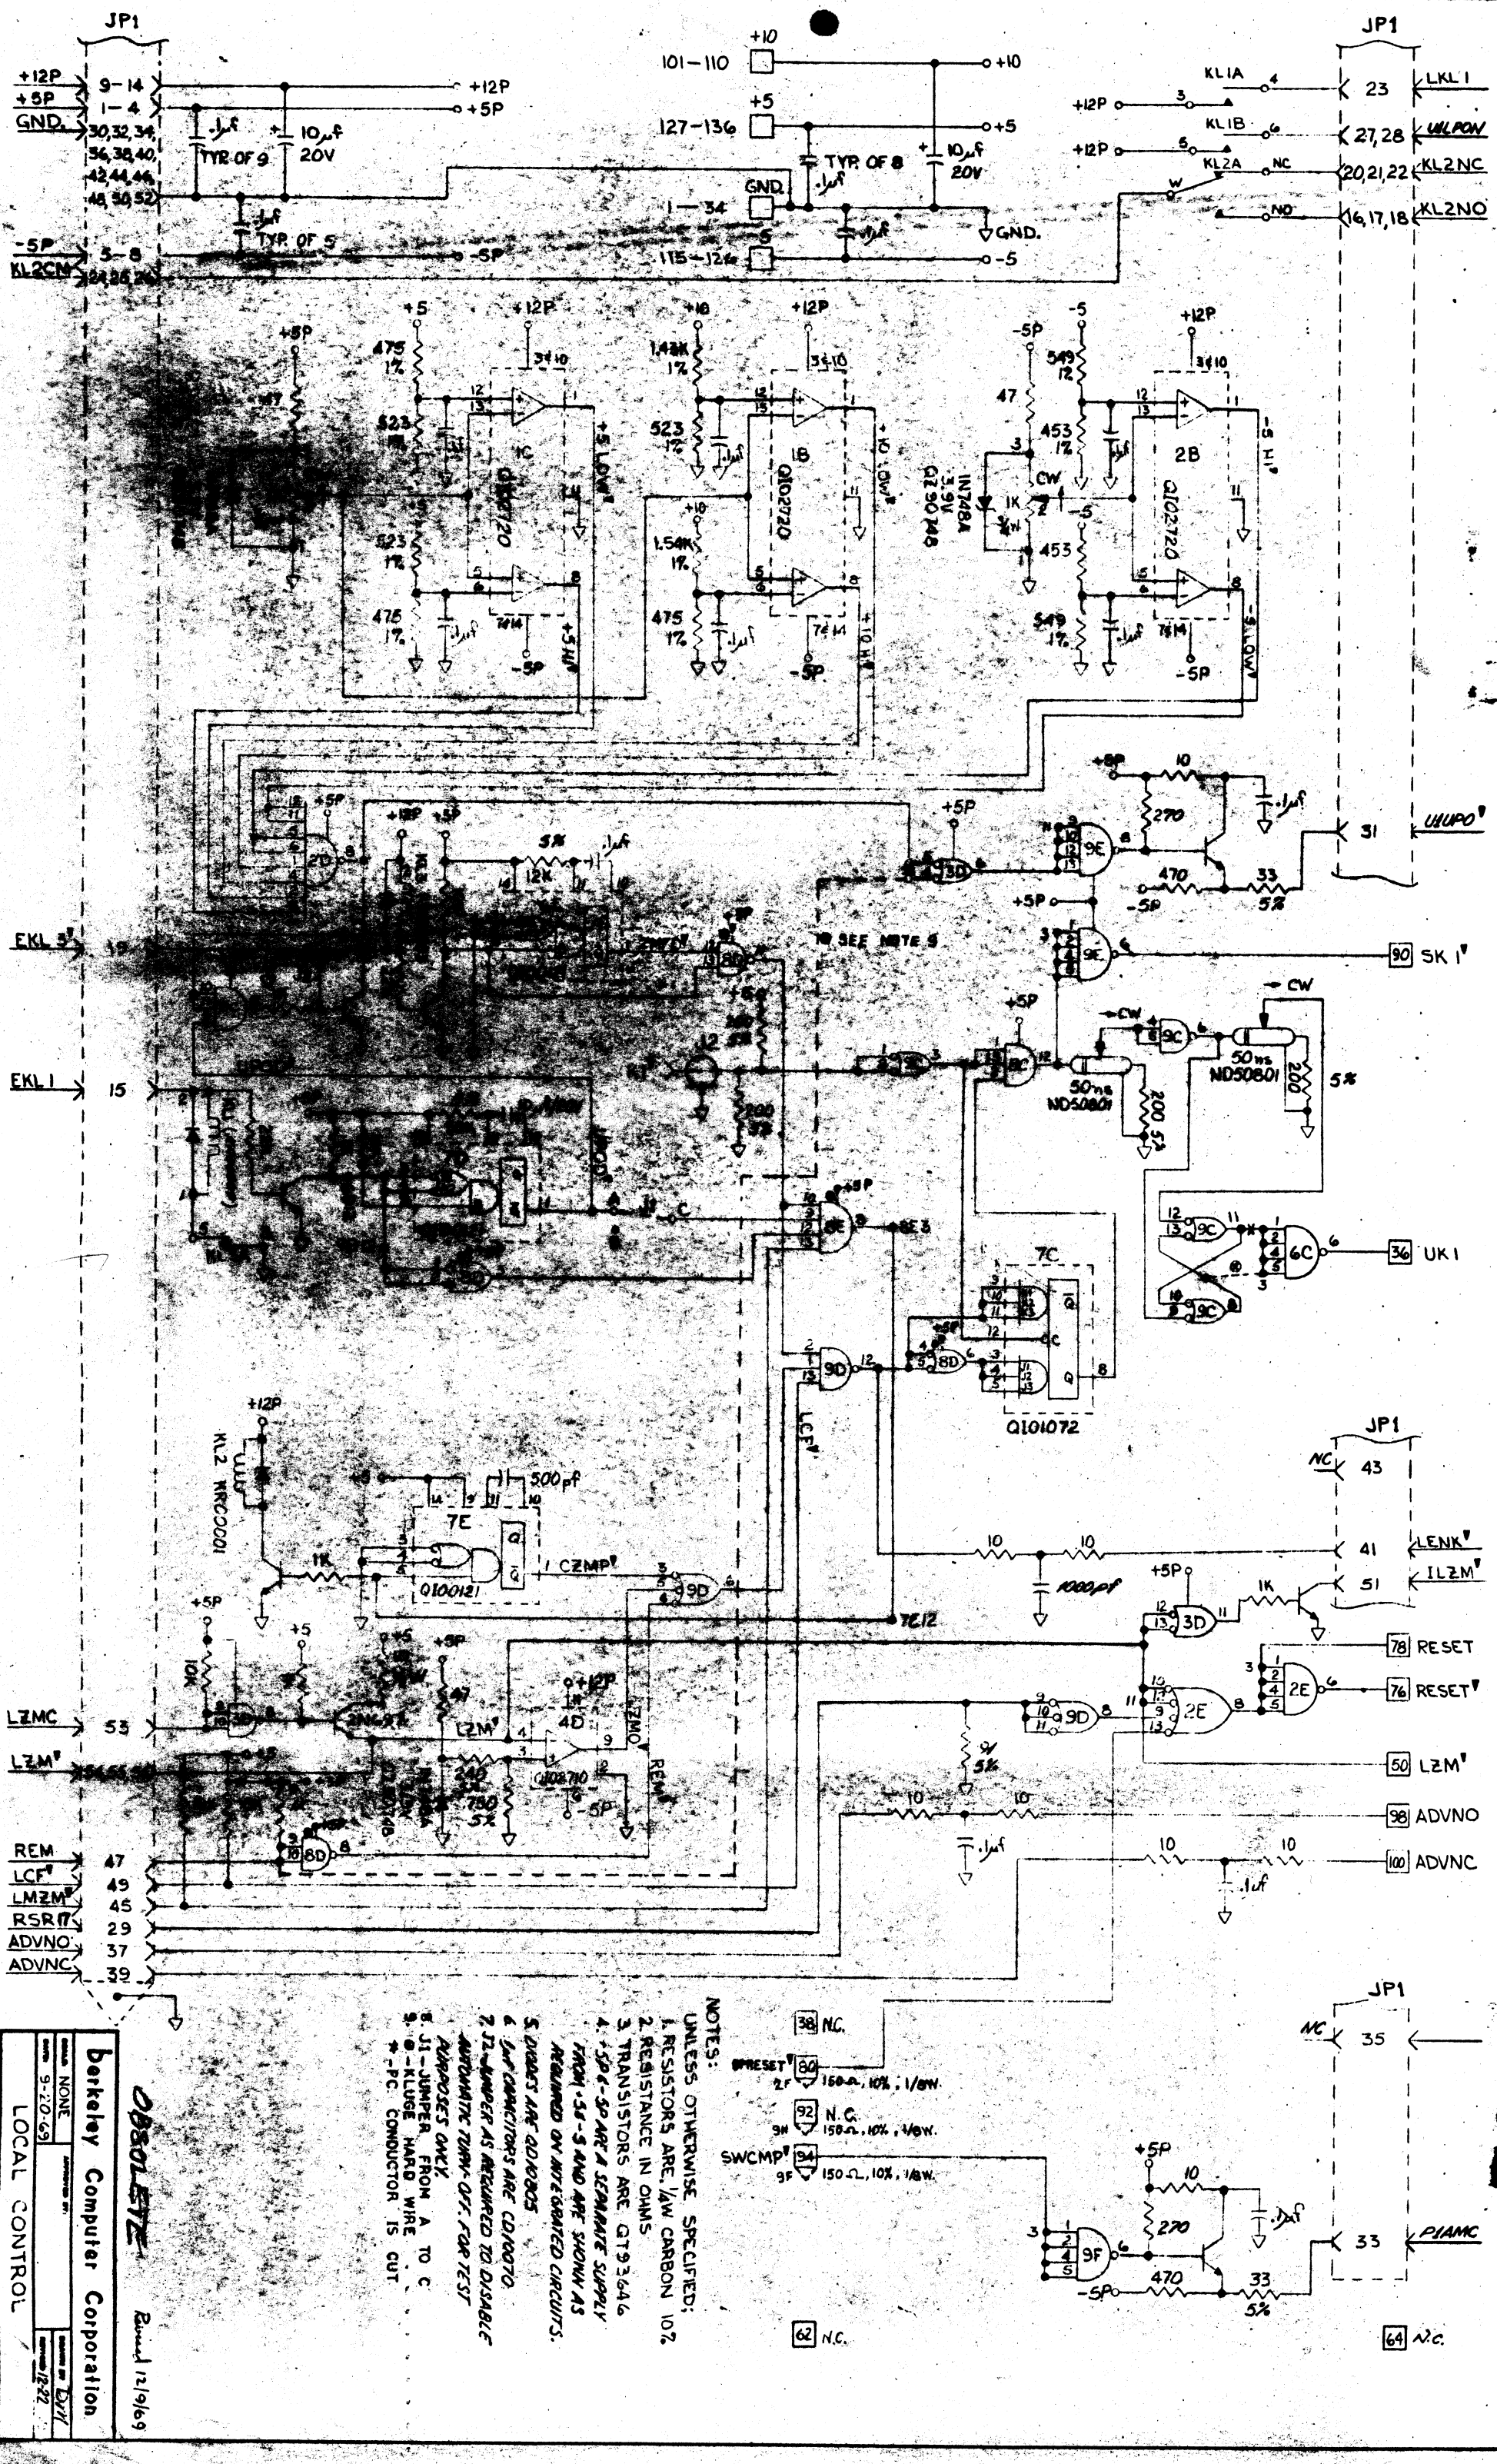

NOTES:
UNLESS OTHERWISE SPECIFIED:
1. RESISTORS ARE 1/4W CARBON 10%
2. RESISTANCE IN OHMS
3. TRANSISTORS ARE GT93646
4. +5P-5P ARE A SEPARATE SUPPLY FROM +5-5 AND ARE SHOWN AS REQUIRED ON INTEGRATED CIRCUITS.
5. DIODES ARE QD10805
6. SMT CAPACITORS ARE CD10070.
7. J2-NUMBER AS REQUIRED TO DISABLE AUTOMATIC TURN-OFF FOR TEST PURPOSES ONLY.
8. J1-JUMPER FROM A TO C
9. ●-KLUGE HARD WIRE
+-PC CONDUCTOR IS CUT

OBSOLETE

Revised 12/9/69

Berkeley Computer Corporation			
	NONE		
	9-20-69		
LOCAL CONTROL			
AMC	UHA1	L00123	.E